

Splitter Panels




Standard and Customised Solutions

PRODUCT FEATURES

- Customised
- Wall-, floor-, combiner- and 19" rackmounted
- For FM, DAB, VHF and UHF
- Easy-switched links

PRODUCT PROFILE

Exir Broadcasting offers patch splitter panels with various numbers of ports, and in most types and dimensions. A number of standard models are available as listed below, but normally units are unique and designed according to customer specifications. The panels are constructed with sturdy frames for mounting either on the floor, on combiner units, on the wall or in a 19" rack. Available with directional couplers and micro switch (interlock).

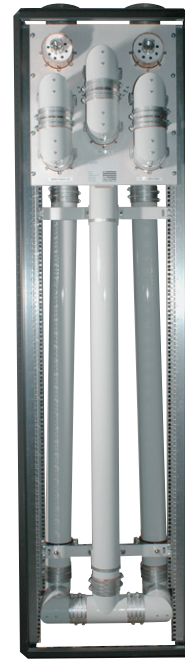

SPLITTER PANELS. All versions are available with interlocking on request. Customised versions on request.

ARTICLE	DIMENSION	PORTS	POWER @max freq.	SPLITTER	FRAME / RACK	RETURN LOSS	FREQUENCIES
BAND II							
ULS2-158R-AB00	1 5/8" unflange	6-ports	15 kW	T-splitter	19" rack mounted	-32 dB	87 - 108 MHz
ULS2-158R-AA00	1 5/8" unflange	11-ports	15 kW	3dB-coupler	Frame mounted	-32 dB	87 - 108 MHz
ULS2-318R-AA00	3 1/8" unflange	6-ports	44 kW	T-splitter	19" rack mounted	-32 dB	87 - 108 MHz
ULS2-318R-AB00	3 1/8" unflange	6-ports	44 kW	T-splitter (8 MHz BW)	19" rack mounted	-32 dB	87 - 108 MHz
ULS2-098R-AA00	RL98 unflange	6-ports	68 kW	3dB-coupler	19" rack mounted	-32 dB	87 - 108 MHz
ULS2-098R-AB00	RL98 unflange	6-ports	68 kW	T-splitter	19" rack mounted	-32 dB	87 - 108 MHz
ULS2-412R-AA00	4 1/2" unflange	6-ports	80 kW	T-splitter	19" rack mounted	-32 dB	87 - 108 MHz
ULS2-618R-AA00	6 1/8" unflange	6-ports	150 kW	T-splitter	Frame mounted	-32 dB	87 - 108 MHz
BAND III							
ULS3-158R-AA00	1 5/8" unflange	6-ports	10 kW	T-splitter	19" rack mounted	-32 dB	174 - 240 MHz
ULS3-158R-AB00	1 5/8" unflange	6-ports	10 kW	M-splitter	19" rack mounted	-32 dB	174 - 240 MHz
ULS3-318R-AA00	3 1/8" unflange	6-ports	30 kW	T-splitter	19" rack mounted	-32 dB	174 - 240 MHz
ULS3-318R-AC00	3 1/8" unflange	7-ports	30 kW	T-splitter	19" rack mounted	-32 dB	174 - 240 MHz
BAND IV/V							
ULS4-R158-AA00	1 5/8" unflange	6-ports	5 kW	3dB-coupler	Frame mounted	-30 dB	470 - 862 MHz
ULS4-158R-AE00	1 5/8" unflange	6-ports	5 kW	3dB-coupler	19" rack mounted	-30 dB	470 - 862 MHz
ULS4-158R-AG00	1 5/8" unflange	6-ports	5 kW	T-splitter	19" rack mounted	-30 dB	470 - 862 MHz
ULS4-158R-AF00	1 5/8" unflange	7-ports	5 kW	T-splitter	19" rack mounted	-30 dB	470 - 862 MHz
ULS4-R318-AA00	3 1/8" unflange	6-ports	15 kW	T-splitter	19" rack mounted	-30 dB	470 - 862 MHz
ULS4-318R-AB00	3 1/8" unflange	7-ports	15 kW	T-splitter	19" rack mounted	-30 dB	470 - 862 MHz
ULS4-098R-AE00	RL98 unflange	6-ports	24 kW	3db-coupler	Combiner mounted	-30 dB	470 - 862 MHz
ULS4-098R-AH00	RL98 unflange	6-ports	24 kW	T-splitter	(19" rack mounted)	-30 dB	470 - 862 MHz
ULS4-098R-AF00	RL98 unflange	7-ports	24 kW	T-splitter	(19" rack mounted)	-30 dB	470 - 862 MHz
ULS4-098R-AG00	RL98 unflange	11-ports	24 kW	T-splitter	(19" rack mounted)	-30 dB	470 - 862 MHz
ULS4-412R-AA00	4 1/2" unflange	8-ports	26 kW	T-splitter	Frame mounted	-30 dB	470 - 862 MHz
ULS4-R120-A0	NAX120 unflange	6-ports	36 kW	3dB-coupler	Combiner mounted	-30 dB	470 - 862 MHz
ULS4-R120-AC00	NAX120 unflange	6-ports	36 kW	T-splitter	Frame mounted	-30 dB	470 - 862 MHz
ULS4-120R-AF00	NAX120 unflange	8-ports	36 kW	T-splitter	Frame mounted	-30 dB	470 - 862 MHz
ULS4-120R-AD00	NAX120 unflange	8-ports	36 kW	T-splitter	Frame mounted	-30 dB	470 - 862 MHz