

UHF Bandpass filter

2.7 kW rms, 8 Pole

BAND IV-V

10 year GUARANTEE




PRODUCT FEATURES

- Small size
- Retunable
- Compact design
- Low insertion loss
- Temperature compensated
- Available with cross-coupling
- 10-year comprehensive warranty



SPECIFICATIONS	140 mm Series
FREQUENCY	470 - 862 MHz
BANDWIDTH	6 - 8 MHz
STANDARD ORDER	8 Poles single cross coupling
OPTIONAL ORDER	8 Poles with or without double cross coupling
ATV	Spurious suppress
DVB	Critical mask
ATSC	Stringent mask
ISDB	Critical mask
IMPEDANCE	50 Ohm
VSWR	>26 dB (<1.11)
TEMPERATURE STABILITY	< 2 kHz / °C
MAX PRODUCT TEMPERATURE	70 °C
ENVIRONMENTAL CONDITION	-5 to 70 °C IP40
STANDARD CONNECTION	1 5/8" unflange
OPTIONAL CONNECTIONS	7/16 m/f, 3 1/8" unflange

DIMENSIONS AND WEIGHT	
DIMENSIONS	658 x 335 x 245-315 mm
L x W x H	(25.9 x 13.2 x 9.6-12.4 in)
WEIGHT	35 kg (77.2 lb)
STANDARD FRAME	Stand alone
OPTIONAL FRAME	19" subrack
COLOUR	Frosted black

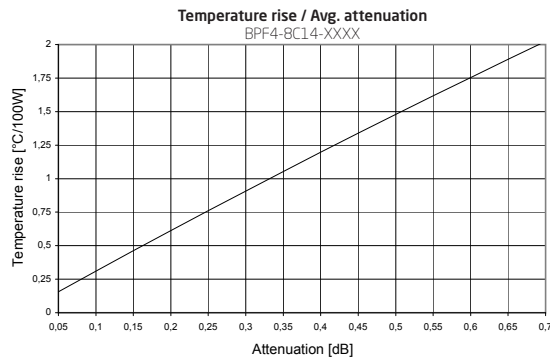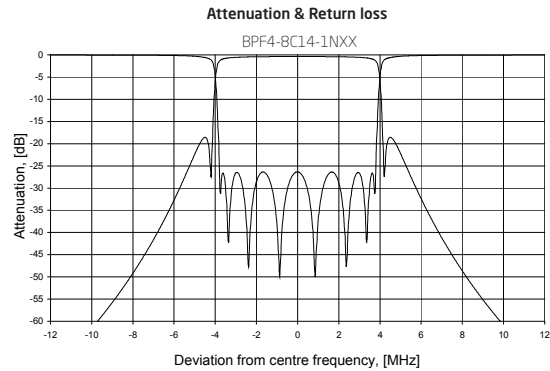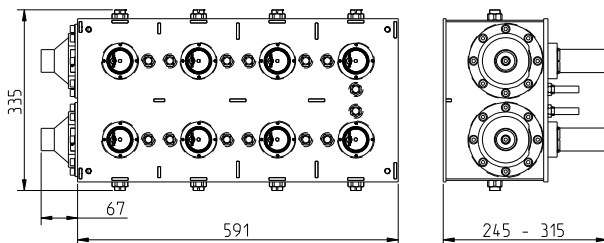

ARTICLE: BPF4-8C14-1N11

- BPF** = Filter type
- 4** = Frequency band
- 8** = Number of poles
- C** = Cavity based
- 14** = Cavity size
- 1** = Number of cross coupling
- N** = Coating
- 1** = Input connection
- 1** = Output connection

TYPICAL DATA*	8 MHz DVB-T	6 MHz ISDB-T	6 MHz ATSC
ARTICLE NO	BPF4-8C14-1N11	BPF4-8C14-1N11	BPF4-8C14-1N11
INSERTION LOSS			
Avg. signal bandwidth	<0.49 dB	<0.62 dB	<0.48 dB
Centre frequency	<0.37 dB	<0.49 dB	<0.43 dB
Signal band edge	± 3.8 MHz <1.40 dB	± 2.79 MHz <1.36 dB	± 2.69 MHz <0.63 dB
	± 4.2 MHz >15 dB	± 3.15 MHz >15 dB	± 3.5 MHz >1.30 dB
	± 6.0 MHz >26 dB	± 4.5 MHz >31 dB	± 6.0 MHz >29 dB
	± 12.0 MHz >51 dB	± 9.0 MHz >61 dB	± 9.0 MHz >63 dB
GROUP DELAY			
	<540 ns	<470 ns	<105 ns
MAX INPUT POWER RATING**			
	2.7 kW / 13 dB (crest factor)	2.2 kW / 13 dB (crest factor)	2.8 kW / 11 dB (crest factor)
TEMPERATURE RISE			
	<1.5 °C / 100 W	<1.8 °C / 100 W	<1.4 °C / 100 W
MASK COMPLIANT			
	Critical mask	Critical mask	Stringent mask

* Data in table is typical data at 666 MHz. To fulfil mask transmitter shoulder level must be >36 dB. The filter can be tuned for other specifications or bandwidth. Please contact us for a designed specification.

** Max input power at <50 °C tempce at max frequency