


Panel Socket

DIN 7/16



PRODUCT FEATURES


- No need for tape or other external weatherproofing
- IP68-classified and water-pressure proof tested down to 25 m
- Designed to maintain high pressure on contact surfaces to reduce intermodulation
- Customising possibilities
- 10-year comprehensive warranty

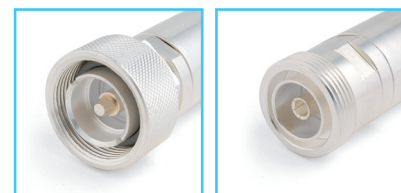

716m-PANF-B0

716f-PANF-B0

COMMON FOR BOTH	
CONNECTOR OPERATING FREQUENCY	0 - 7.5 GHz
VSWR / RETURN LOSS	
0 - 2 GHz	1.036 / -35 dB
0 - 2.5 GHz	1.065 / -30 dB
INTERMODULATION*	
2 x 20 W transmitter	< -156 dBc
OPERATING TEMPERATURE	-55 °C to +80 °C
DIMENSIONS	
W x D x H	32 x 32 x 21 mm (1.25 x 1.25 x 0.86 in)
PIECES IN BOX	As requested

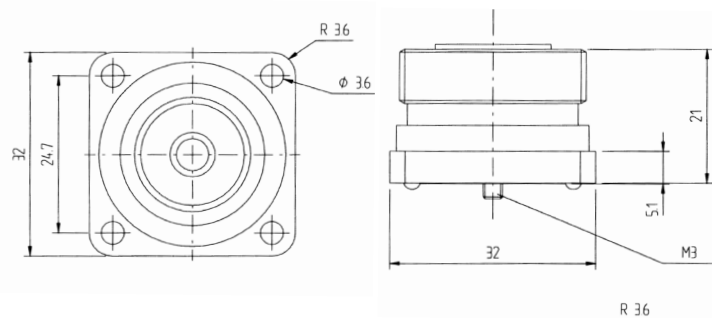

ARTICLE	716m-PANF-B0	716f-PANF-B0
CONNECTOR	DIN 7/16 male	DIN 7/16 female

* During intermodulation measurement attached cables are exposed to shock and vibration.