


# Power Splitters

2200 - 2600 MHz



## PRODUCT FEATURES

- Good VSWR
- Made of silver-plated brass
- EPDM O-rings eliminate water intrusion
- 10-year comprehensive warranty
- No need for tape or other external weatherproofing
- Includes clamp for secure mounting (CL40-1C078-A0)
- IP68-classified and water-pressure proof tested down to 25 m

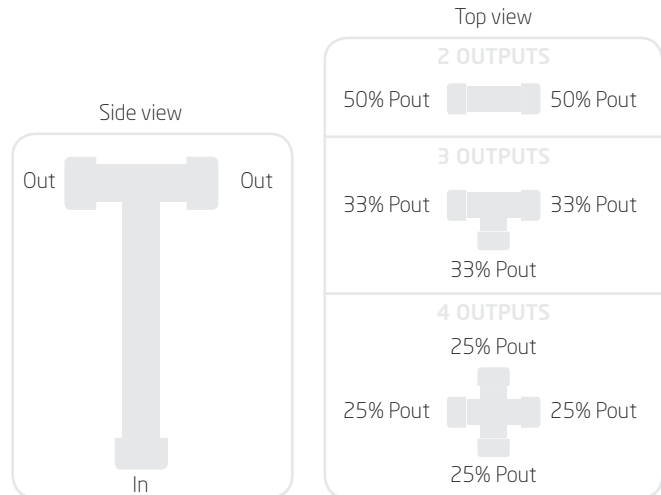

ARTICLE	AT2M-716F-AH00	AT3M-716F-AH00	AT4M-716F-AH00
<b>FREQUENCY RANGE</b>	2200 - 2600 MHz	2200 - 2600 MHz	2200 - 2600 MHz
<b>INPUT POWER</b>	500 W	500 W	500 W
<b>CONNECTORS</b>	DIN 7/16 female	DIN 7/16 female	DIN 7/16 female
<b>INPUTS/OUTPUTS</b>	1/2	1/3	1/4
<b>VSWR / RETURN LOSS</b>	1.12 / -25 dB	1.12 / -25 dB	1.12 / -25 dB
<b>INSERTION LOSS</b>	<0.05 dB	<0.05 dB	<0.05 dB
<b>INTERMODULATION*</b>			
2 x 20 W transmitter	< -156 dBc	< -156 dBc	< -156 dBc
<b>IMPEDANCE</b>	50 ohm	50 ohm	50 ohm
<b>OPERATING TEMPERATURE</b>	-55 °C to +80 °C	-55 °C to +80 °C	-55 °C to +80 °C
<b>PIECES IN BOX</b>	10	10	10

\* During intermodulation measurement attached cables are exposed to shock and vibration.