


# 4-Way Power Splitter


790 - 2700 MHz



Side view

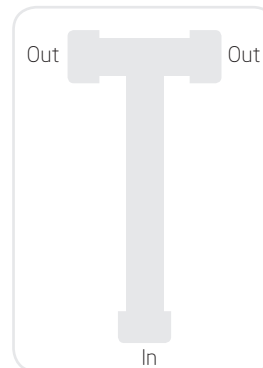

Top view



## PRODUCT FEATURES

- IP68-classified and water-pressure proof tested down to 25 m
- No need for tape or other external weatherproofing
- Made from silver-plated brass
- 10-year comprehensive warranty

ARTICLE	AT4G-716F-AB00	AT4G-00NF-AB00
<b>FREQUENCY RANGE</b>	790 - 2700 MHz	790 - 2700 MHz
<b>INPUT POWER</b>		
790 - 960 MHz	1000 W	300 W
1700 - 2200 MHz	700 W	150 W
2500 - 2700 MHz	500 W	100 W
<b>CONNECTORS</b>	DIN 7/16 female	N female
<b>INPUTS/OUTPUTS</b>	1/2	1/2
<b>VSWR / RETURN LOSS</b>	1.17 / -22 dB	1.17/ -22 dB
<b>INSERTION LOSS</b>	<0.05 dB	<0.05 dB
<b>INTERMODULATION</b>		
2 x 20 W transmitter	< -156 dBc	< -156 dBc
<b>IMPEDANCE</b>	50 ohm	50 ohm
<b>WEIGHT</b>	0.5 kg (1.1 lb)	0.5 kg (1.1 lb)
<b>OPERATING TEMPERATURE</b>	55 °C to +80 °C	55 °C to +80 °C
<b>DIMENSIONS</b>		
H x W x D	235 x 90 x 90 mm (9.3 x 3.6 x 3.6 in)	245 x 111 x 111 mm (9.7 x 4.4 x 4.4 in)
<b>PIECES IN BOX</b>	10	10